

# SMARTFLOW®

## MOLD PROTECTIVE SWITCHES

Smartflow® Mold Protective Limit Switches are designed and built by engineers with expert mold-building experience. Thinswitch®, SmartLock® and Versaswitch™ are the benchmark switches in the injection molding industry. Molders rely on them to provide dependable position indication and protection for valuable injection molds.

**Thinswitch** for ejector plate return

- ◆ Standard Temperature
- ◆ High Temperature
- ◆ Liquid-Resistant
- ◆ Global (3mm, 4mm or 3/16" height) for use with European or US Standard Molds

**SmartLock** Slide Retainer and Limit Switch for slide retention and position verification

- ◆ Standard Temperature
- ◆ High Temperature
- ◆ Locking Plunger

**Versaswitch** for core pull applications

- ◆ Optional Mounting Bracket



**SMARTLOCK®**  
U.S. Patent No. 6,126,429




**THINSWITCH®**  
U.S. Patent No. 5,446,252



**VERSASWITCH™**



**GLOBAL THINSWITCH®**  
U.S. Patent No. 7,569,783

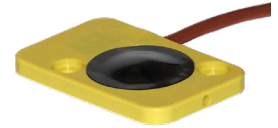


**LIQUID-RESISTANT THINSWITCH®**  
U.S. Patent No. 6,982,392

*Design and specifications are subject to change without notice.*


## GLOBAL THINSWITCH® Liquid-Resistant 3mm, 4mm, 3/16" Height

### General Description

Smartflow Global Thinswitch Limit Switch helps prevent accidental closure in injection molds by verifying ejector plate return in injection molds with 3mm, 4mm or 3/16" rest buttons, and where occasional water or oil spray is present. A polyurethane dome covers the actuator spring, protecting internal gold switch contacts from environmental contamination.

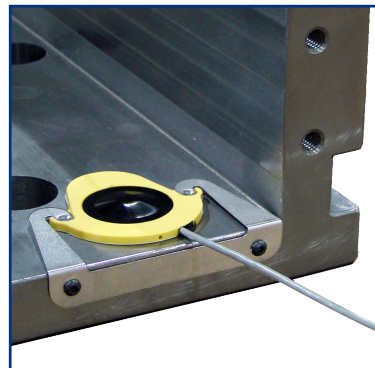

A special mounting bracket aids installation from the edge of the mold. The bracket allows molders to slide the Thinswitch into place without disassembling the mold or using screws to hold the switch in place. Spacers placed under the switch accommodate different rest button heights.

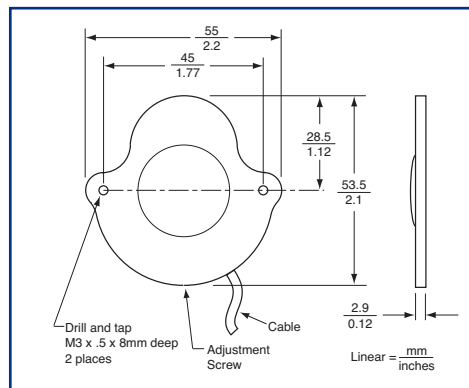

### Part Number

TW-222-LR



### Specifications

Operating Temperature ..... 80°C (176°F) max.  
Switching ..... SPST (normally open)  
Contacts ..... BeCu with Hard Gold Plating

Rated Current (Resistive) at 24VDC vs. Operating Temperature		
mAmps	°C	°F
100	29.4	85
90	49.0	120
80	68.3	155
70	79.4	175

### Materials

Body .....Fiberglass-Reinforced Nylon  
Dome .....Polyurethane  
Back Cover .....Polyester film  
Mounting Bracket..... Stainless Steel  
Wire Leads ..... 28ga stranded  
2-conductor, shielded cable  
2m long, ends stripped and tinned

*SMARTFLOW Limit Switches are designed for use in very low power mold protection control circuits. They are not intended to switch heavy loads in power applications.*



4500 E 142nd Street  
Grandview, MO 64030 USA  
Tel: 816-878-6675  
www.smartflow-usa.com

# SMARTFLOW®

## THINSWITCH® LIMIT SWITCH

### General Description

Smartflow Thinswitch Limit Switch verifies ejector plate return in plastics injection molds. This small switch is thin enough to fit inside the ejector housing. It can also be used for core slides, or places where space is limited. Choose from the original design or the liquid-resistant housing for areas where water or oil spray is present.

The Thinswitch Limit Switch has been tested for reliability over 10 million cycles without failure. Two switches can be used in series for larger molds.



### Part Numbers

Original Thinswitch

**T-222** ..... 175°F (79.4°C) max.  
**HT-291** ..... 250°F (121°C) max.

Liquid-Resistant Thinswitch (IP41)

**T-222-LR** ..... 175°F (79.4°C) max.  
**HT-291-LR** ..... 250°F (121°C) max.

### Specifications

Electrical  
250VAC ..... 5 Amps Resistive  
4 Amps Inductive  
28VDC (sea level) ..... 5 Amps Resistive  
4 Amps Inductive

See chart below for temperature effects on maximum current rating

Rated Current vs. Steel Temperature					
T-222			HT-291		
Amps	°F	°C	Amps	°F	°C
5.0	85	29.4	5.0	100	37.7
4.0	120	49.0	4.5	155	68.3
3.0	155	68.3	4.0	210	98.8
2.0	175	79.4	3.5	250	121.1


Switching ..... SPDT

### Materials


Body ..... Fiberglass-Reinforced Nylon  
Spring ..... Stainless Steel  
Back Cover ..... Polyester Film  
Wire Leads ..... 22ga stranded  
3-conductor, shielded cable  
6ft. (1.8m) long  
ends stripped and tinned



### T-222 & HT-291 Dimensions

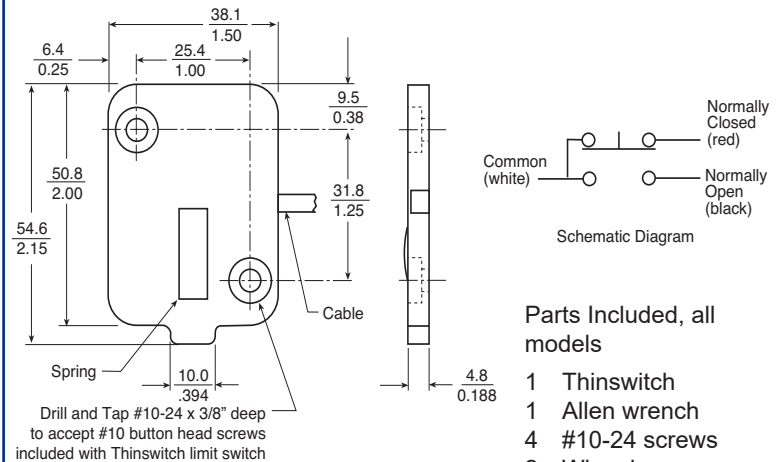

### T-222-LR & HT-291-LR Dimensions

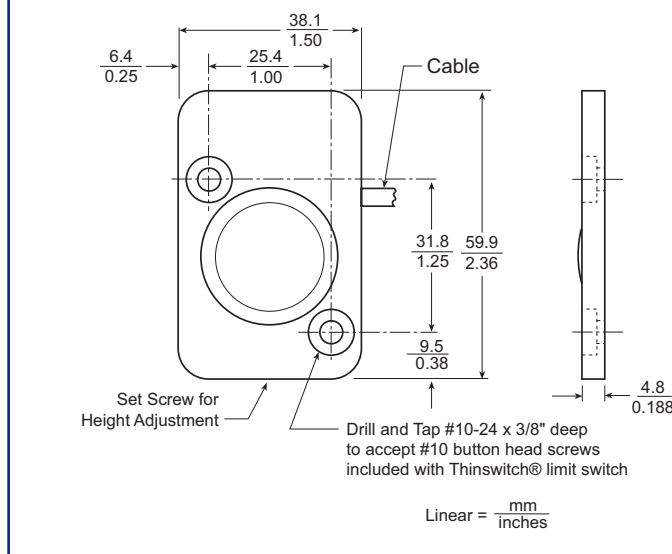






## VERSASWITCH™ LIMIT SWITCH

### General Description

Smartflow Versaswitch Limit Switch installs into an injection mold to indicate location of the core, preventing tool damage.

Versaswitch is easily installed into a 5/8"-24 female thread. The switch actuates when 3.5 lbs of force is applied to the plunger. Actuation height is adjusted by threading the switch to the correct position in the installation. The switch is held in place via a lock-washer and hex nut. SPDT snap action switch provides a simple, positive indication of the mold or core location.

Optional mounting bracket is available to aid installation. Threaded fastener holes facilitate mounting the switch in many positions. The bracket is made from corrosion-resistant anodized aluminum.

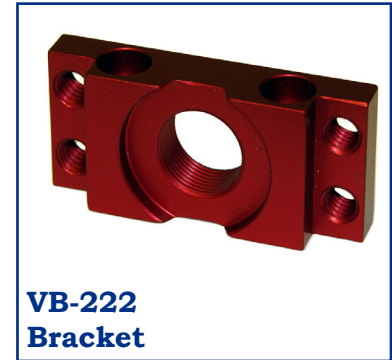

### Part Numbers

- V-222** ..... Versaswitch  
includes lock-washer and nut
- VB-222** ..... Mounting Bracket  
red anodized aluminum


### Switch Specifications

- Electrical ..... 240VAC  
5 Amps Resistive  
3 Amps Inductive
- Operating Temperature ..... 180°F max.  
(82°C max.)
- Switching ..... SPDT
- Operating Force ..... 3.5 lbs (1.6 kg)
- Pre-travel to operating point ..... 0.06" (1.5mm)
- Over-travel ..... 0.01" (.25mm)
- Enclosure ..... Watertight per IP68S

### Switch Materials

- Body ..... Anodized Aluminum/Epoxy
- Plunger ..... Stainless Steel
- Nut ..... Anodized Aluminum
- Lock-washer ..... Zinc-Plated Steel
- Wire Leads ..... 22ga stranded  
3-conductor, shielded cable  
6ft. (1.8m) long  
ends stripped and tinned

### V-222 Switch Dimensions

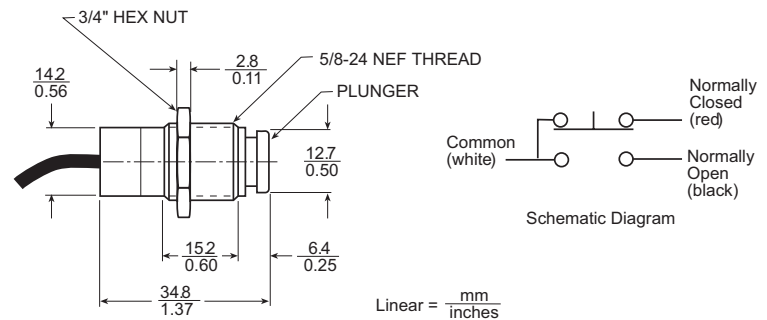

### VB-222 Bracket Dimensions

