


# TECHNICAL DATA SHEET

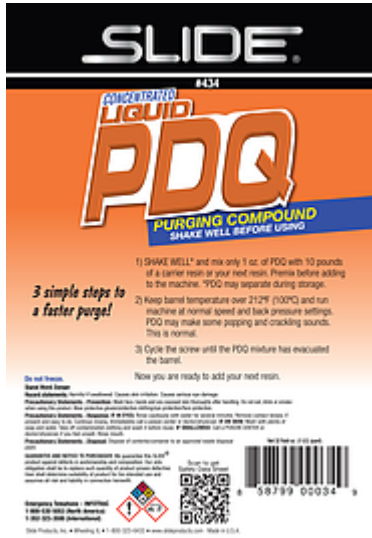

## Portable PDQ Purging Compound (50 bags/case) 43401

### Product Description

P.D.Q. works with the carrier resin to remove all thermoplastics, and is effective for resin-to-resin and color-to-color changes. It requires no soaking, maximizing production up-time and eliminates the need to keep cracked acrylic purging resin inventory. P.D.Q. lets you purge quickly, easily and safely, and at a fraction of the cost of conventional purges for injection, extrusion or blow molding. Just toss the pre-measured packet in the hopper with your carrier resin and the packet will dissolve during the purge.

### Applications

Purging Compound

### Unit Package Description

package of 50 1-ounce packets

### Generic Description

Purging Compound

### Net Weight Fill

1 net ounce per bag

### UPC Code

none

### Appearance

Off-white Liquid

### Odor

Slight Amonia

### Flash Point F

None

### Flash Point C

None

### Base Type

Water

### Evaporation Rate

N/A

### HMIS Rating

Not Determined

### DOT Proper Shipping Name

Not Regulated, Cleaning Compounds, NOI

### Removal

N/A

### Units Per Case

50

### Case Weight (lbs)

5

### Working Temperature F

212 to 450 degrees

### Working Temperature C

100 to 232 degrees

### Propellant

N/A

### NFPA Aerosol Flammability Level

N/A

